


TMPSI10B : PIEZO-RESISTIVE PRESSURE SENSOR

FEATURE

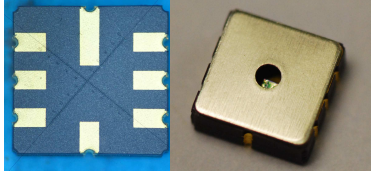

- 1 Bar – 11 Bar absolute Pressure Range
- Uncompensated
- Piezo-resistive silicon micro-machine sensor
- High linearity and Low % ERROR

Description and Designed

The pressure sensor is designed for pressure sensor systems with highest linearity and low % error. The device consists of a piezo-resistive micro-machine pressure sensor die mounted on chip Ceramic QFN 5x5mm 8 lead Package type.

Table 1. Maximum Rating

Characteristics	Symbol	Min	Max	Unit
Pressure Range ⁽¹⁾	Pop	1	11	Bar
Temperature Range ⁽⁹⁾	T _A	-20	120	°C
Supply Voltage ⁽²⁾	V _S	1.5	15	Vdc

Table 2. Operating Characteristics

All parameter are measured at **5 V** supply at T_A = 23 °C , unless otherwise specified

Characteristics	Symbol	Min	Typ	Max	Unit
Supply Current ⁽³⁾	I _S	-	0.9	-	mAdc
Full Scale Span ⁽⁴⁾	V _{FSS}	79	80	82	mV
Offset ⁽⁵⁾	V _{off}	-16	0	16	mV
Sensitivity (1 – 11 Bar)	$\Delta V / \Delta P$	7.9	8.05	8.2	mV /Bar
Non Linearity ⁽⁶⁾	N _L	-0.05	-	0.05	%FSO
Pressure Hysteresis ⁽⁷⁾	P _H	-0.42		+0.42	%FSO
Accuracy (Variation between chip)	-	-0.25		+0.25	%FSO
Resistance Bridge ⁽⁸⁾	R _B	4.0	4.5	5.0	kΩ
The Temperature coefficient offset ⁽¹⁰⁾	TCO	-0.05	-	-0.05	%°CFSO
The Temperature coefficient sensitivity ⁽¹¹⁾	TCS	- 0.05	-	0.05	%°CFSO

APPLICATION

- | | |
|--|---|
| <ul style="list-style-type: none"> • Map sensor • Tire pressure monitoring systems (TPMS) • Difference pressure | <ul style="list-style-type: none"> • Test Leak system • Water pressure test system • Water Level Measurement |
|--|---|

PIN CONFIGURATION




Table 1. Pin connect for pressure sensor

Pin NO.	Pin Name	Function
1,7	Vs	Supply voltage of Wheatstone bridge
2	OUT-	Negative output voltage of Wheatstone bridge
6	OUT+	Positive output voltage of Wheatstone bridge
3,5	GND	Ground
8,4	NC	No contract

Figure 1. pressure sensor Schematic

TYPICAL CHARACTERISTICS : TMPSI10B

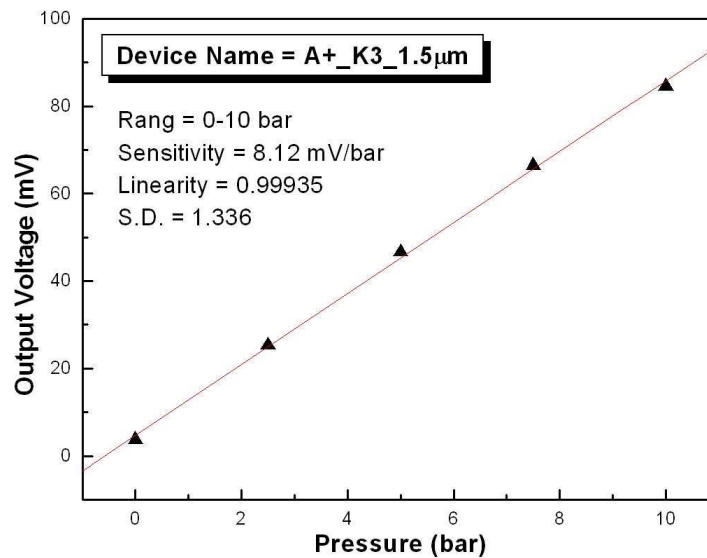


Figure 2. Output-Voltage as function of testing pressure at supply voltage of 5V

Sample Circuit :


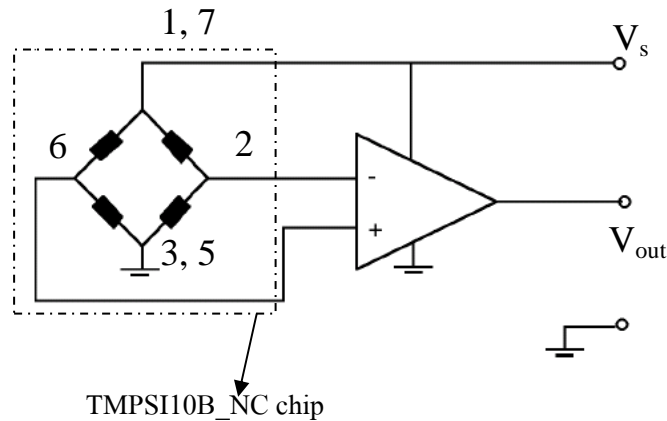


Figure 3 Sample circuit for application of the pressure sensor

NOTES

1. 1 Bar equals 14.5 psi
2. The Constance supply voltage is biased in Whetstones bridge configuration.
3. The total current using whetstones bridge configuration.
4. Full Scale Span (V_{FSS}) is defined as the algebraic difference between the output voltage at full rated pressure and the output voltage at the minimum rated pressure.
5. Offset (V_{off}) is defined as the output voltage at the minimum rated pressure.
6. Error value of end point line fit between output minimum rated pressure and maximum rate pressure.
7. Pressure Hysteresis: Output deviation at any pressure within the specified range, when this pressure is cycled to and from the minimum or maximum rated pressure, at 25°C.
8. Output deviation with minimum rated pressure applied, over the temperature range of 25 to 120°C, relative to 25°C.
9. Difference output deviation with minimum rated pressure applied and maximum applied pressure, relative to the temperature range of 25 to 120°C with temperature is 25°C.

Packaging layout of TMPSI10B

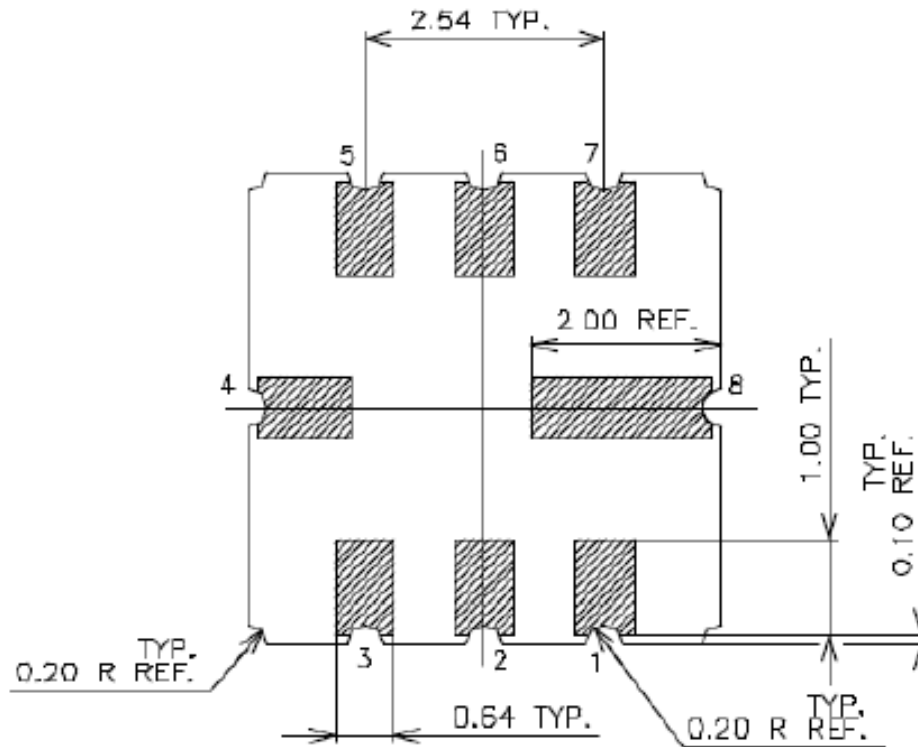

- Note : 1. Drawing Unit : mm
 2. Plating Thickness
 NICKEL: 1.27-8.89 um
 GOLD : 0.5-1.5um

Figure 4 Packaging layout of TMPSI10B